

# Vertically Polarized, Log Periodic 80° / 17.5 dBi

## LPA-185080/12CF

When ordering, replace "\_\_\_" with connector type.

### Mechanical specifications

Length	1806 mm	71.1 in
Width	104 mm	4.1 in
Depth	150 mm	5.9 in
4) Weight	4.8 kg	10.5 lbs

#### Wind Area

Front	0.188 m <sup>2</sup>	2.02 ft <sup>2</sup>
Side	0.271 m <sup>2</sup>	2.92 ft <sup>2</sup>

#### Rated Wind Velocity (Safety factor 2.0)

>270 km/hr >168 mph

#### Wind load @ 100 mph (161 km/hr)

Front	325 N	73.1 lbs
Side	440 N	98.9 lbs

Antenna consisting of aluminum alloy with brass feedlines covered by a UV safe fiberglass radome.

### Mounting & Downtilting:

Wall mounted or pole tower mount with mounting brackets.

Mounting bracket kit #26799997

Downtilt bracket kit #26799999

The downtilt bracket kit includes the mounting bracket kit.

### Electrical specifications

Frequency Range	1850-1990 MHz
Impedance	50Ω
3) Connector	NE, E-DIN
1) VSWR	≤1.4:1
Polarization	Vertical
1) Gain	17.5 dBi
2) Power Rating	250 W
1) Half Power Angle	
H-Plane	80°
E-Plane	5°
1) Electrical Downtilt	0°
1) Null Fill	10%
Lightning Protection	Direct Ground

<sup>1)</sup> Typical Values

<sup>2)</sup> Power Rating limited by connector only.


<sup>3)</sup> NE indicates an elongated N Connector.

E-DIN indicates an elongated DIN Connector.


<sup>4)</sup> The antenna weight listed above does not include the bracket weight.

Improvements to mechanical and/or electrical performance of the antenna may be made without notice.

### Radiation-pattern<sup>1)</sup>

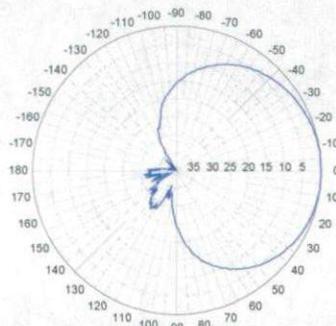


Horizontal

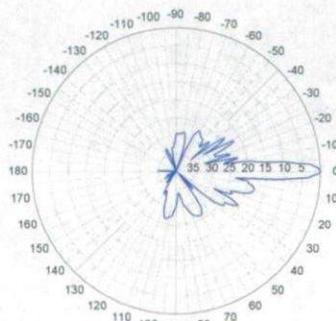

Vertical

Radiation patterns for all antennas are measured with the antenna mounted on a fiberglass pole.

Mounting on a metal pole will typically improve the Front-to-Back Ratio.

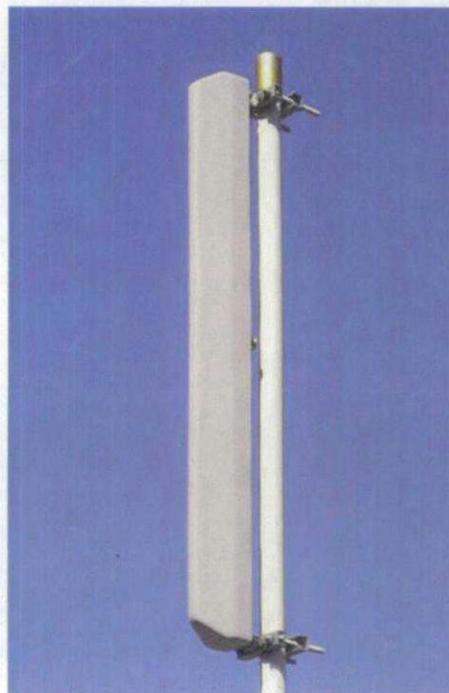

Amphenol Antel's Exclusive 3T (True Transmission Line Technology) Antenna Design:

- True log-periodic design allows for superior front-to-side characteristics to minimize sector overlap.
- Unique feedline design eliminates the need for conventional solder joints in the signal path.
- A non-collinear system with access to every radiating element for broad bandwidth and superior performance.
- Air as insulation for virtually no internal signal loss.

Every Amphenol Antel antenna is under a five-year limited warranty for repair or replacement.

Antenna available with center-fed connector only.

CF Denotes a Center-Fed Connector.

1850-1990 MHz

**Amphenol Antel, Inc.**  
The Antenna Technology Company

Revision Date: 1/27/05

## **Flexent® Modular Cell 4.0**

### **Description**

---

The *Flexent*® Modular Cell 4.0 builds on our vast experience in spread spectrum to deliver the most flexible, future-focused base station on the market. This base station introduces the *Flexent*® *OneBTS*™ common platform digital shelf into CDMA networks. This shelf, with a field upgrade, will eventually support both CDMA and UMTS in the frame.

The *Flexent* Modular Cell 4.0 packs 6 carriers/3 sectors into an outdoor cabinet that is the same size as the *Flexent* Modular Cell 3.0. The smaller indoor cabinet will support 4 carriers/3 sectors. In addition to capacity gains, this digital shelf will support additional enhancements as we bring them to market.

Our Bell Labs developers are working on Intelligent Antennas, Transmit Diversity, and BLAST technologies. These technologies will enhance the capacities and capabilities of the *Flexent* Modular Cell 4.0. Each of the features can be added to the *Flexent* Modular Cell 4.0 in the field - in a single maintenance window. This means that you can deploy the *Flexent* Modular Cell 4.0 today and add capacity and capabilities whenever they are available and when you need them. It means that the future is available on your timetable, when your business plan calls for them, no matter what your business plan might be.

### **Value description**

---

The *Flexent* Modular Cell 4.0, with its future-proof design, enables easy and cost-effective network upgrades to:

- Add additional capacity, when needed, to support network growth
- Support additional functionality and advanced capabilities

### **Features**

---

#### **Investment Protection**

- Increase capacity, when you need it, to grow your network
- Add advanced features and capabilities, with quick and easy installation

#### **Scalability**

- Support up to 6 carriers/3 sectors in a single outdoor cabinet
- Support up to 4 carriers/3 sectors in the indoor cabinet

#### **Reduced Footprint**

- Provides additional capacity and functionality — in the same footprint as the *Flexent* Modular Cell 3.0

# BLAST: Bell Labs Layered Space-Time

*An Architecture for Realizing Very High Data Rates  
over Fading Wireless Channels*

---

## What is BLAST?

BLAST is an extraordinarily bandwidth-efficient approach to wireless communication which takes advantage of the spatial dimension by transmitting and detecting a number of independent co-channel data streams using multiple, essentially co-located, antennas.

The central paradigm behind BLAST is the exploitation, rather than the mitigation, of multipath effects in order to achieve very high spectral efficiencies (bits/sec/Hz), significantly higher than are possible when multipath is viewed as an adversary rather than an ally.

Using our laboratory testbed, the BLAST team recently demonstrated what we believe to be **unprecedented wireless spectral efficiencies, ranging from 20 - 40 bps/Hz**. By comparison, the efficiencies achieved using traditional wireless modulation techniques range from around 1 - 5 bps/Hz (mobile cellular) to around 10 - 12 bps/Hz (point-to-point fixed microwave systems). In the 30 kHz bandwidth utilized by our research testbed, the raw spectral efficiencies realized thus far in the lab correspond to payload data rates ranging from roughly 0.5 Mb/s to 1 Mb/s. By contrast, the data rate achievable in this bandwidth using typical traditional methods is only about 50 kbps.

This [high-level overview](#) discusses BLAST in more detail.

[Blast Measurements](#) have been done and reported.

[Blast in the Press](#)

For additional information, contact [rav@bell-labs.com](mailto:rav@bell-labs.com).

---

## BLAST-related open literature

- D. Chizhik, G. Foschini, M. Gans, and R. Valenzuela, *Keyholes, Correlations, and Capacities of Multielement Transmit and Receive Antennas*, IEEE Transaction on Wireless Communications. Vol. 1, No. 2, April 2002, pp. 361-368.
- G. J. Foschini, M. J. Gans, *Capacity when Using Multiple Antennas at Transmit and Receive Sites and Rayleigh-Faded Matrix Channel is Unknown to the Transmitter*, Advances in Wireless Communications, Ed. J. M Holtzman and M. Zorzi, Kulwer Academic Publishers, 1998.
- G. D. Golden, G. J. Foschini, R. A. Valenzuela, P. W. Wolniansky, *Detection Algorithm and Initial Laboratory Results using the V-BLAST Space-Time Communication Architecture*, Electronics Letters, Vol. 35, No. 1, Jan. 7, 1999, pp. 14-15.
- G. J. Foschini, G.D.Golden, R.A.Valenzuela, P.W.Wolniansky, *Simplified Processing for Wireless Communication at High Spectral Efficiency*, IEEE Journal on Select Areas in Coummunications, Vol. 17, No.

11, 1999.

- D-S. Shiu, G.J. Foschini, M.J. Gans, J.M.Kahn, Fading Correlation, and its Effect on the Capacity of Multielement Antenna Systems, IEEE Transactions on Communications, Vol. 48, No. 3, 2000.
- P. W. Wolniansky, G. J. Foschini, G. D. Golden, R. A. Valenzuela, *V-BLAST: An Architecture for Realizing Very High Data Rates Over the Rich-Scattering Wireless Channel*, invited paper, Proc. ISSSE-98, Pisa, Italy, Sept. 29, 1998.  
[ [PostScript \(839 kb\)](#)] [ [gzipped PostScript \(71 kb\)](#)] [ [PDF \(46 kb\)](#)]
- G. D. Golden, G. J. Foschini, P. W. Wolniansky, R. A. Valenzuela, *V-BLAST: A High Capacity Space-Time Architecture for the Rich-Scattering Wireless Channel*, Proc. Int'l Symposium on Advanced Radio Technologies, Boulder, CO, Sept. 10, 1998.
- G. D. Golden, G. J. Foschini, R. A. Valenzuela, P. W. Wolniansky, *V-BLAST: A High Capacity Space-Time Architecture for the Rich-Scattering Wireless Channel*, Fifth Workshop on Smart Antennas in Wireless Mobile Communications, Stanford Univ., July 23-24, 1998.
- G. J. Foschini and M. J. Gans, *On Limits of Wireless Communications in a Fading Environment When Using Multiple Antennas*, Wireless Personal Communications, Volume 6, No. 3, March 1998, p. 311.
- G. J. Foschini and R. A. Valenzuela, *Initial Estimation of Communications Efficiency of Indoor Wireless Channels*, Wireless Networks, 3 (1997) pp 141-154.
- G. J. Foschini, *Layered Space-Time Architecture for Wireless Communication in a Fading Environment When Using Multiple Antennas*, Bell Labs Technical Journal, Vol. 1, No. 2, Autumn 1996, pp 41-59.
- G. J. Foschini and M. J. Gans, *Capacity When Using Diversity at Transmit and Receive Sites and the Matrix Channel is Unknown at the Transmitter*, Proceedings of the 6-th WINLAB Workshop on 3rd Generation Wireless Information Networks, March 20-21, 1996, New Brunswick, New Jersey.

### BLAST- Measurement Literature

- M. Gans et. al., *Multielement Antenna Systems Capacity Measurements at 2.44GHz in Suburban Outdoor Environment*, IEEE Vehicular Technology Conference, Spring 2001.
- J. Ling, et. al., *Multiple Transmit Multiple Receive (MTMR) Capacity Survey in Manhattan*, Electronic Letters, Vol. 37, No. 16, August 2001, pg. 1041.
- D. Chizhik, J. Ling, P. Wolniansky, R. Valenzuela, N. Costa, and K. Huber, *Multiple Input Multiple Output Measurements and Modeling in Manhattan*, Submitted to JSAC Special Issue on MIMO.

[haleem@bell-labs.com](mailto:haleem@bell-labs.com)

Last updated 6/5/00


Copyright ©Lucent Technologies 1998, 1999, 2000. All rights reserved.

# SD060

## Liquid Cooled Diesel Engine Generator Sets

Continuous Standby Power Rating  
60KW 60 Hz / 60KVA 50 Hz

Prime Power Rating  
48KW 60 Hz / 48KVA 50 Hz

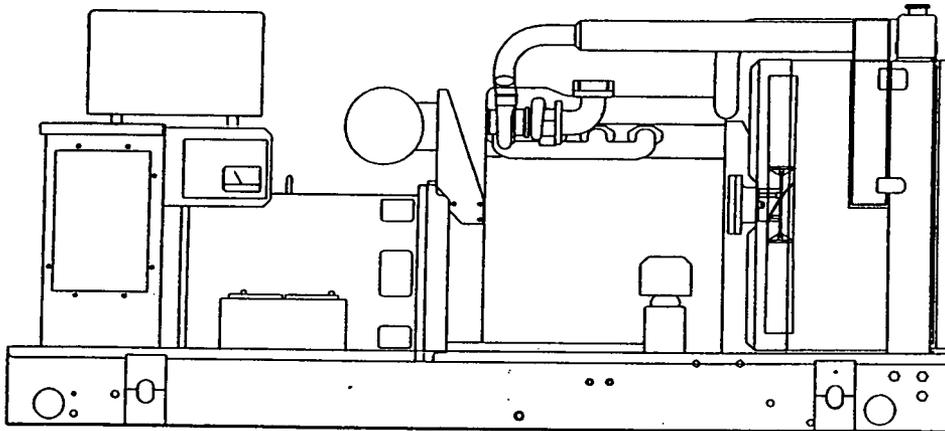

Power Matched  
**GENERAC 3.9DTA ENGINE**  
Turbocharged

## FEATURES

- **INNOVATIVE DESIGN & PROTOTYPE TESTING** are key components of GENERAC'S success in "IMPROVING POWER BY DESIGN." But it doesn't stop there. Total commitment to component testing, reliability testing, environmental testing, destruction and life testing, plus testing to applicable CSA, NEMA, EGSA, and other standards, allows you to choose GENERAC POWER SYSTEMS with the confidence that these systems will provide superior performance.
- **TEST CRITERIA:**
  - ✓ PROTOTYPE TESTED
  - ✓ SYSTEM TORSIONAL TESTED
  - ✓ ELECTRO-MAGNETIC INTERFERENCE
  - ✓ NEMA MG1-22 EVALUATION
  - ✓ MOTOR STARTING ABILITY
  - ✓ SHORT CIRCUIT TESTING
  - ✓ UL 2200 COMPLIANCE AVAILABLE
- **SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION.** This state-of-the-art power maximizing regulation system is standard on all Generac models. It provides optimized
- FAST RESPONSE to changing load conditions and MAXIMUM MOTOR STARTING CAPABILITY by electronically torque-matching the surge loads to the engine.
- **SINGLE SOURCE SERVICE RESPONSE** from Generac's dealer network provides parts and service know-how for the entire unit, from the engine to the smallest electronic component. You are never on your own when you own an GENERAC POWER SYSTEM.
- **ECONOMICAL DIESEL POWER.** Low cost operation due to modern diesel engine technology. Better fuel utilization plus lower cost per gallon provide real savings.
- **LONGER ENGINE LIFE.** Generac heavy-duty diesels provide long and reliable operating life.
- **GENERAC TRANSFER SWITCHES, SWITCHGEAR AND ACCESSORIES.** Long life and reliability is synonymous with GENERAC POWER SYSTEMS. One reason for this confidence is that the GENERAC product line includes its own transfer systems, accessories, switchgear and controls for total system compatibility.

# GENERAC®

---

## POWER SYSTEMS, INC.

# APPLICATION & ENGINEERING DATA

SD060

## GENERATOR SPECIFICATIONS

TYPE .....	Four-pole, revolving field
ROTOR INSULATION .....	Class H
STATOR INSULATION .....	Class H
TOTAL HARMONIC DISTORTION .....	<3%
TELEPHONE INTERFERENCE FACTOR (TIF) .....	<50
ALTERNATOR .....	Self-ventilated and drip-proof
BEARINGS (PRE-LUBED & SEALED) .....	1
COUPLING .....	Direct, Flexible Disc
LOAD CAPACITY (STANDBY) .....	100%
LOAD CAPACITY (PRIME) .....	110%

**NOTE: Emergency loading in compliance with NFPA 99, NFPA 110, paragraph 5-13.2.6. Generator rating and performance in accordance with ISO8528-5, BS5514, SAE J1349, ISO3046 and DIN6271 standards.**

### EXCITATION SYSTEM

- BRUSHLESS ..... Magnetically coupled DC current ✓  
Eight-pole exciter w/ battery-driven field boost ✓  
Mounted outboard of main bearing ✓
- PERMANENT MAGNET EXCITER ..... Eighteen pole exciter ✓  
Magnetically coupled DC current ✓  
Mounted outboard of main bearing ✓
- REGULATION ..... Solid-state ✓  
±1% regulation ✓

## GENERATOR FEATURES

- Four pole, revolving field generator is directly connected to the engine shaft through a heavy-duty, flexible disc for permanent alignment.
- Generator meets temperature rise standards for class "F" insulation as define by NEMA MG1-32.6 and NEMA1-1.65, while the insulation system meets the requirements for the higher class "H" rating.
- All models have passed a three-phase symmetrical short circuit test to assure system protection and reliability.
- Unit is tested with an oscillograph for motor-starting ability by measuring instantaneous voltage dip.
- All models utilize an advanced wire harness design for reliable interconnection within the circuitry.
- Magnetic circuit, including amortisseur windings, tooth and skewed stator design, provides a minimal level of waveform distortion and an electromagnetic interference level which meets accepted requirements for standard AM radio, TV, and marine radio telephone applications.
- Voltage waveform deviation, total harmonic content of the AC waveform, T.I.F. (Telephone Influence Factor) and non-linear loading have been evaluated to acceptable standards in accordance with NEMA MG1.
- Alternator is self-ventilated and drip-proof constructed.
- Fully life-tested protective systems, including "field circuit and thermal overload protection" and optional main-line circuit breakers are capable of handling full output capacity.
- System Torsional acceptability confirmed during Prototype Testing.

Rating definitions - Standby: Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. (All ratings in accordance with BS5514, ISO3046 and DIN6271). Prime (Unlimited Running Time): Applicable for supplying electric power in lieu of commercially purchased power. Prime power is the maximum power available at variable load. A 10% overload capacity is available for 1 hour in 12 hours. (All ratings in accordance with BS5514, ISO3046, ISO8528 and DIN6271).

## ENGINE SPECIFICATIONS

MAKE .....	GENERAC
MODEL .....	3.9DTA
CYLINDERS .....	4 in-line
DISPLACEMENT .....	3.9 Liter (238 cu.in.)
BORE .....	104 mm (4.09 in.)
STROKE .....	115 mm (4.52 in.)
COMPRESSION RATIO .....	16.5:1
INTAKE AIR .....	Turbocharged/Aftercooled
NUMBER OF MAIN BEARINGS .....	5
CONNECTING RODS .....	4-Drop Forged Steel
CYLINDER HEAD .....	Cast Iron Overhead Valve
PISTONS .....	4- Aluminum Alloy
CRANKSHAFT .....	Hardened, Steel

### VALVE TRAIN

LIFTER TYPE .....	Solid
INTAKE VALVE MATERIAL .....	Special Heat Resistant Steel
EXHAUST VALVE MATERIAL .....	Special Heat Resistant Steel
HARDENED VALVE SEATS .....	Replaceable

### ENGINE GOVERNOR

- MECHANICAL (Gear Driven) ..... Standard  
FREQUENCY REGULATION, NO-LOAD TO FULL LOAD ... 5.0%  
STEADY STATE REGULATION ..... ±0.33%
- ELECTRONIC ..... Optional  
FREQUENCY REGULATION, NO-LOAD TO FULL LOAD ... 0.5%  
STEADY STATE REGULATION ..... ±0.25%

### LUBRICATION SYSTEM

TYPE OF OIL PUMP .....	Gear
OIL FILTER .....	Full flow, Cartridge
CRANKCASE CAPACITY .....	18 Litres (19 qts.)
OIL COOLER .....	Oil to water

### COOLING SYSTEM

TYPE OF SYSTEM .....	Pressurized, Closed Recovery
WATER PUMP .....	Pre-Lubed, Self-Sealing
TYPE OF FAN .....	Pusher
NUMBER OF FAN BLADES .....	7
DIAMETER OF FAN .....	457 mm (18 in.)
COOLANT HEATER .....	120V, 1800 W

### FUEL SYSTEM

FUEL .....	#2D Fuel (Min Cetane #40) (Fuel should conform to ASTM Spec.)
FUEL FILTER .....	Single Cartridge
FUEL INJECTION PUMP .....	Stanadyne
FUEL PUMP .....	Mechanical
INJECTORS .....	Multi-Hole, Nozzle Type
ENGINE TYPE .....	Direct Injection
FUEL LINE (Supply) .....	7.94 mm (0.31 in.)
FUEL RETURN LINE .....	6.35 mm (0.25 in.)
STARTING AID .....	Glow Plugs

### ELECTRICAL SYSTEM

BATTERY CHARGE ALTERNATOR .....	30 Amps at 24 V
STARTER MOTOR .....	24 V
RECOMMENDED BATTERY .....	(2)—12 Volt, 90 A.H., 4DLT
GROUND POLARITY .....	Negative

SD060

**OPERATING DATA**

	STANDBY		PRIME	
	SD060		SD060	
<b>GENERATOR OUTPUT VOLTAGE/KW-60Hz</b>	<u>Rated AMP</u>		<u>Rated AMP</u>	
120/240V, 1-phase, 1.0 pf	60	250	48	200
120/208V, 3-phase, 0.8 pf	60	208	48	166
120/240V, 3-phase, 0.8 pf	60	180	48	144
277/480V, 3-phase, 0.8 pf	60	90	48	72
600V, 3-phase, 0.8 pf	60	72	48	58
	NOTE: Consult your Generac dealer for additional voltages.			
<b>GENERATOR OUTPUT VOLTAGE/KVA-50Hz</b>	<u>Rated AMP</u>		<u>Rated AMP</u>	
110/220V, 1-phase, 1.0 pf	48	218	38	172
115/200V, 3-phase, 0.8 pf	60	173	48	138
100/200V, 3-phase, 0.8 pf	60	173	48	138
231/400V, 3-phase, 0.8 pf	60	87	48	69
480V, 3-phase, 0.8 pf	60	72	48	58
	NOTE: Consult your Generac dealer for additional voltage			
<b>MOTOR STARTING KVA</b>				
Maximum at 35% instantaneous voltage dip with standard alternator; 50/60 Hz	<u>120/208/240V</u>	<u>277/480V</u>	<u>120/208/240V</u>	<u>277/480V</u>
with optional alternator; 50/60 Hz	100/120	117/141	100/120	117/141
	234/281	276/331	234/281	276/331
<b>FUEL</b>				
Fuel consumption—60 Hz	<u>100%</u>	<u>80%</u>	<u>100%</u>	<u>80%</u>
Load gal./hr.	4.3	3.6	3.6	3.0
liters/hr.	16.3	13.5	13.6	11.3
Fuel consumption—50 Hz	3.6	3.0	3.0	2.5
gal./hr.	13.5	11.2	11.3	9.3
liters/hr.				
Fuel pump lift				
<b>COOLING</b>				
Coolant capacity	System - lit. (US gal.)	15.9 (4.2)	15.9 (4.2)	
	Engine - lit. (US gal.)	6.4 (1.7)	6.4 (1.7)	
	Radiator - lit. (US gal.)	9.5 (2.5)	9.5 (2.5)	
Coolant flow/min.	60 Hz - lit. (US gal.)	128 (34)	128 (34)	
	50 Hz - lit. (US gal.)	107 (28)	107 (28)	
Heat rejection to coolant 60 Hz full load	BTU/hr.	170,900	136,700	
Heat rejection to coolant 50 Hz full load	BTU/hr.	142,400	113,900	
Inlet air to radiator	60 Hz - m <sup>3</sup> /min. (cfm)	204 (7,200)	204 (7,200)	
	50 Hz - m <sup>3</sup> /min. (cfm)	170 (6004)	170 (6004)	
Max. air temperature to radiator	°C (°F)	54.4 (130)	54.4 (130)	
Max. ambient temperature	°C (°F)	48.9 (120)	48.9 (120)	
<b>COMBUSTION AIR REQUIREMENTS</b>				
Flow at rated power	60 Hz - cfm	209	168	
	50 Hz - m <sup>3</sup> /min.	4.7	3.8	
<b>EXHAUST</b>				
Exhaust flow at rated output	60 Hz - m <sup>3</sup> /min. (cfm)	15.5 (549)	12.4 (439)	
	50 Hz - m <sup>3</sup> /min. (cfm)	12.3 (434)	10 (353)	
Max recommended back pressure	"Hg	1.5	1.5	
Exhaust temperature 60 Hz (full load)	°C (°F)	524 (975)	459 (858)	
Exhaust outlet size		3"	3"	
<b>ENGINE</b>				
Rated RPM	60 Hz	1800	1800	
	50 Hz	1500	1500	
HP at rated KW	60 Hz	92	74	
	50 Hz	73	59	
Piston speed	60 Hz - m/min. (ft./min.)	414 (1358)	414 (1358)	
	50 Hz - m/min. (ft./min.)	345 (1132)	345 (1132)	
BMEP	60 Hz - psi	170	138	
	50 Hz - psi	161	130	
<b>DERATION FACTORS</b>				
Temperature				
	5% for every 10°C above - °C	25	25	
	2.77% for every 10°F above - °F	77	77	
Altitude				
	1.1% for every 100 m above - m	1829	1829	
	3.5% for every 1000 ft. above - ft.	6000	6000	

# STANDARD ENGINE & SAFETY FEATURES

SD060

- High Coolant Temperature Automatic Shutdown
- Low Coolant Level Automatic Shutdown
- Low Oil Pressure Automatic Shutdown
- Overspeed Automatic Shutdown (Solid-state)
- Crank Limiter (Solid-state)
- Oil Drain Extension
- Radiator Drain Extension
- Factory-Installed Cool Flow Radiator
- Closed Coolant Recovery System
- UV/Ozone Resistant Hoses
- Rubber-Booted Engine Electrical Connections
- Secondary Fuel Filter
- Fuel Lockoff Solenoid
- Stainless Steel Flexible Exhaust Connection
- Battery Charge Alternator
- Battery Cables
- Battery Tray
- Vibration Isolation of Unit to Mounting Base
- 12 Volt, Solenoid-activated Starter Motor
- Air Cleaner
- Fan Guard
- Control Console
- Radiator Duct Adapter

## OPTIONS

### ■ OPTIONAL COOLING SYSTEM ACCESSORIES

- Coolant Heater 120V

### ■ OPTIONAL FUEL ACCESSORIES

- Flexible Fuel Lines
- UL Listed Fuel Tanks
- Base Tank Low Fuel Alarm
- Primary Fuel Filter
- Primary Fuel Filter with Heater

### ■ OPTIONAL EXHAUST ACCESSORIES

- Critical Exhaust Silencer

### ■ OPTIONAL ELECTRICAL ACCESSORIES

- Battery, 12 Volt, 135 A.H., 4DLT
- 2A Battery Charger
- 10A Dual Rate Battery Charger
- Battery Heater

### ■ OPTIONAL ALTERNATOR ACCESSORIES

- Alternator Upsizing
- Alternator Strip Heater
- Alternator Tropicalization
- Voltage Changeover Switch
- Main Line Circuit Breaker

### ■ CONTROL CONSOLE OPTIONS

- Analog Control "C" Panel (Bulletin 0151160SBY)
- Analog/Digital Control "E" Panel (Bulletin 0161310SBY)

### ■ ADDITIONAL OPTIONAL EQUIPMENT



- Automatic Transfer Switch
- Isochronous Governor
- 3 Light Remote Annunciator
- 5 Light Remote Annunciator
- 20 Light Remote Annunciator
- Remote Relay Panels
- Unit Vibration Isolators (Pad/Spring)
- Oil Make-Up System
- Oil Heater
- 5 Year Warranties
- Export Boxing
- GenLink® Communications Software

### ■ OPTIONAL ENCLOSURE

- Weather Protective
- Sound Attenuated
- Aluminum and Stainless Steel
- Enclosed Muffler

Distributed by:

Design and specifications subject to change without notice. Dimensions shown are approximate. Contact your Generac dealer for certified drawings. DO NOT USE THESE DIMENSIONS FOR INSTALLATION PURPOSES.

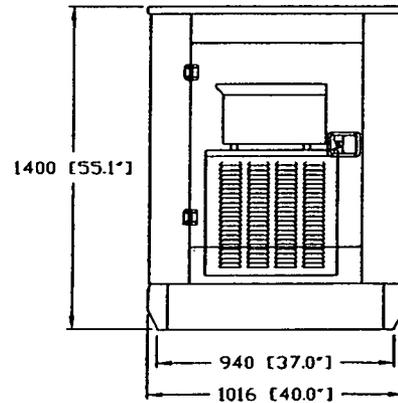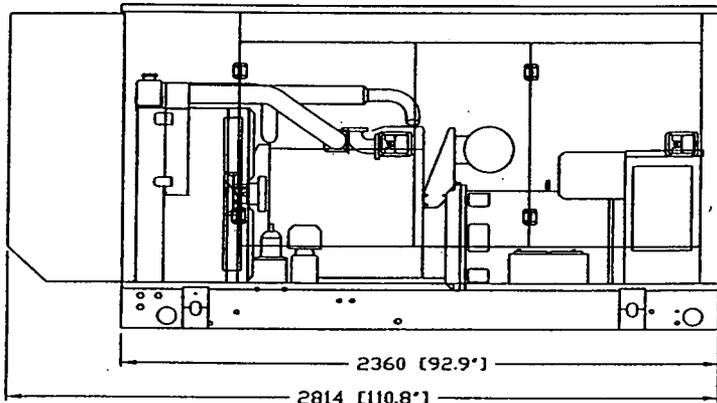

mm [in]

GENERAC POWER SYSTEMS, INC. • P.O. BOX 8 • WAUKESHA, WI 53187

262/544-4811 • FAX 262/544-4851