

Vertically Polarized, Log Periodic 80° / 14 dBd

LPA-80080/6CF

When ordering, replace "___" with connector type.

Mechanical specifications

Length	1800 mm	70.87 in
Width	140 mm	5.51 in
Depth	335 mm	13.19 in
4) Weight	9.53 kg	21 lbs
Wind Area		
Front	0.252 m ²	2.71 ft ²
Side	0.603 m ²	6.50 ft ²
Rated Wind Velocity (Safety factor 2.0)		
	>295 km/hr	>183 mph
Wind load @ 100 mph (161 km/hr)		
Front	415 N	93.3 lbs
Side	870 N	195.6 lbs

Antenna consisting of aluminum alloy with brass feedlines covered by a UV safe fiberglass radome.

Mounting & Downtilting:

Mounting brackets attach to a pipe diameter of Ø50-102 mm (2.0-4.0 in).

Mounting bracket kit #21699999

Downtilt bracket kit #21699999

The downtilt bracket kit includes the mounting bracket kit.

Electrical specifications

Frequency Range	806-960 MHz
Impedance	50Ω
3) Connector	NE, E-DIN
1) VSWR	≤1.4:1
Polarization	Vertical
1) Gain	14 dBd
2) Power Rating	500 W
1) Half Power Angle	
H-Plane	80°
E-Plane	10°
1) Electrical Downtilt	0°
1) Null Fill	10%
Lightning Protection	Direct Ground

1) Typical Values


2) Power Rating limited by connector only.

3) NE indicates an elongated N Connector.
E-DIN indicates an elongated DIN Connector.


4) The antenna weight listed above does not include the bracket weight.

Improvements to mechanical and/or electrical performance of the antenna may be made without notice.

Radiation-pattern¹⁾

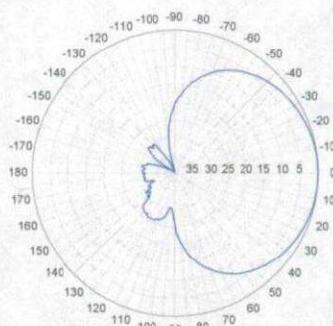

Horizontal

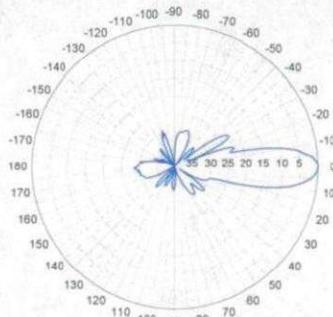

Vertical


Featuring upper side lobe suppression.

Radiation patterns for all antennas are measured with the antenna mounted on a fiberglass pole.

Mounting on a metal pole will typically improve the Front-to-Back Ratio.

CF Denotes a Center-Fed Connector.

806-960 MHz

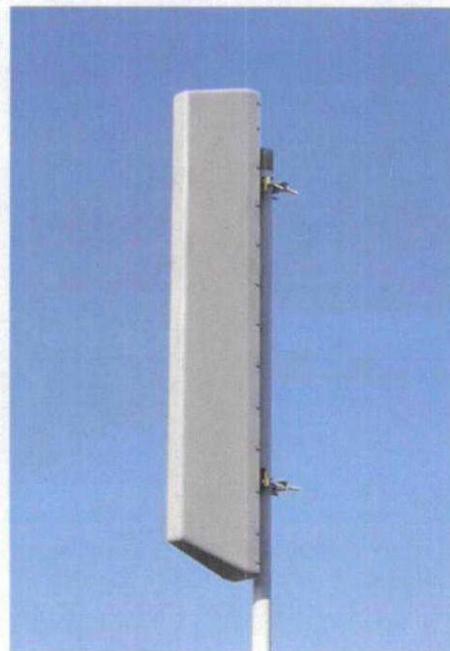

Amphenol Antel's
Exclusive 3T (True
Transmission Line
Technology)
Antenna Design:

- True log-periodic design allows for superior front-to-side characteristics to minimize sector overlap.
- Unique feedline design eliminates the need for conventional solder joints in the signal path.
- A non-collinear system with access to every radiating element for broad bandwidth and superior performance.
- Air as insulation for virtually no internal signal loss.

Every Amphenol Antel antenna is under a five-year limited warranty for repair or replacement.

Antenna available with center-fed connector only.



Revision Date: 12/1/05

Vertically Polarized, Log Periodic 80° / 17.5 dBi

LPA-185080/12CF ___ 2°

When ordering, replace "___" with connector type.

Mechanical specifications

Length	1806 mm	71.1 in
Width	104 mm	4.1 in
Depth	150 mm	5.9 in
⁴⁾ Weight	4.8 kg	10.5 lbs
Wind Area		
Front	0.188 m ²	2.02 ft ²
Side	0.271 m ²	2.92 ft ²
Rated Wind Velocity (Safety factor 2.0)		
	>270 km/hr	>168 mph
Wind load @ 100 mph (161 km/hr)		
Front	325 N	73.1 lbs
Side	440 N	98.9 lbs

Antenna consisting of aluminum alloy with brass feedlines covered by a UV safe fiberglass radome.

Mounting & Downtilting:

Wall mounted or pole tower mount with mounting brackets.

Mounting bracket kit #26799997

Downtilt bracket kit #26799999

The downtilt bracket kit includes the mounting bracket kit.

Electrical specifications

Frequency Range	1850-1990 MHz
Impedance	50Ω
³⁾ Connector	NE, E-DIN
¹⁾ VSWR	≤1.4:1
Polarization	Vertical
¹⁾ Gain	17.5 dBi
²⁾ Power Rating	250 W
¹⁾ Half Power Angle	
H-Plane	80°
E-Plane	5°
¹⁾ Electrical Downtilt	2°
¹⁾ Null Fill	10%
Lightning Protection	Direct Ground

¹⁾ Typical Values

²⁾ Power Rating limited by connector only.


³⁾ NE indicates an elongated N Connector.

E-DIN indicates an elongated DIN Connector.


⁴⁾ The antenna weight listed above does not include the bracket weight.

Improvements to mechanical and/or electrical performance of the antenna may be made without notice.

Radiation-pattern¹⁾

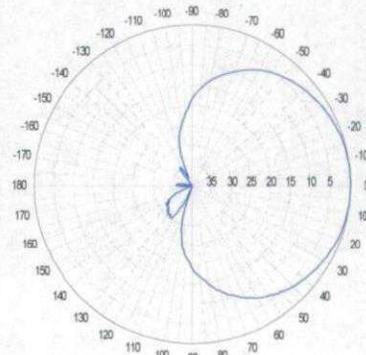

Horizontal

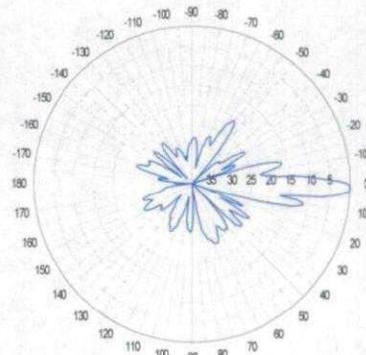


Vertical

Radiation patterns for all antennas are measured with the antenna mounted on a fiberglass pole.

Mounting on a metal pole will typically improve the Front-to-Back Ratio.

CF Denotes a Center-Fed Connector.

1850-1990 MHz

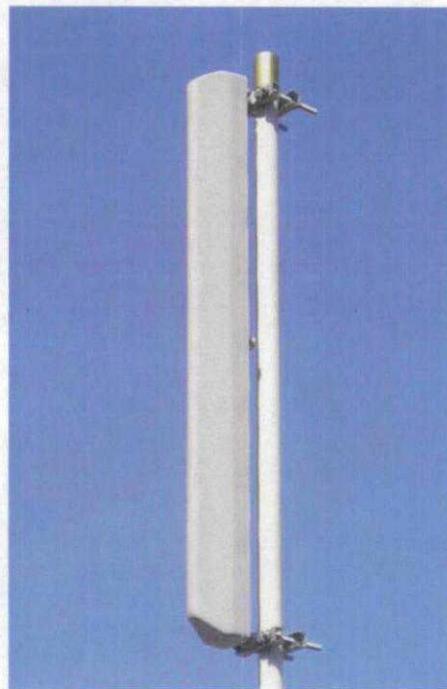

Amphenol Antel's Exclusive 3T (True Transmission Line Technology) Antenna Design:

- True log-periodic design allows for superior front-to-side characteristics to minimize sector overlap.
- Unique feedline design eliminates the need for conventional solder joints in the signal path.
- A non-collinear system with access to every radiating element for broad bandwidth and superior performance.
- Air as insulation for virtually no internal signal loss.

Every Amphenol Antel antenna is under a five-year limited warranty for repair or replacement.

Antenna available with center-fed connector only.

Amphenol Antel, Inc.
The Antenna Technology Company

Revision Date: 8/25/05

Flexent® Modular Cell 4.0

Description

The *Flexent*® Modular Cell 4.0 builds on our vast experience in spread spectrum to deliver the most flexible, future-focused base station on the market. This base station introduces the *Flexent*® *OneBTS*™ common platform digital shelf into CDMA networks. This shelf, with a field upgrade, will eventually support both CDMA and UMTS in the frame.

The *Flexent* Modular Cell 4.0 packs 6 carriers/3 sectors into an outdoor cabinet that is the same size as the *Flexent* Modular Cell 3.0. The smaller indoor cabinet will support 4 carriers/3 sectors. In addition to capacity gains, this digital shelf will support additional enhancements as we bring them to market.

Our Bell Labs developers are working on Intelligent Antennas, Transmit Diversity, and BLAST technologies. These technologies will enhance the capacities and capabilities of the *Flexent* Modular Cell 4.0. Each of the features can be added to the *Flexent* Modular Cell 4.0 in the field - in a single maintenance window. This means that you can deploy the *Flexent* Modular Cell 4.0 today and add capacity and capabilities whenever they are available and when you need them. It means that the future is available on your timetable, when your business plan calls for them, no matter what your business plan might be.

Value description

The *Flexent* Modular Cell 4.0, with its future-proof design, enables easy and cost-effective network upgrades to:

- Add additional capacity, when needed, to support network growth
- Support additional functionality and advanced capabilities

Features

Investment Protection

- Increase capacity, when you need it, to grow your network
- Add advanced features and capabilities, with quick and easy installation

Scalability

- Support up to 6 carriers/3 sectors in a single outdoor cabinet
- Support up to 4 carriers/3 sectors in the indoor cabinet

Reduced Footprint

- Provides additional capacity and functionality — in the same footprint as the *Flexent* Modular Cell 3.0

BLAST: Bell Labs Layered Space-Time

*An Architecture for Realizing Very High Data Rates
over Fading Wireless Channels*

What is BLAST?

BLAST is an extraordinarily bandwidth-efficient approach to wireless communication which takes advantage of the spatial dimension by transmitting and detecting a number of independent co-channel data streams using multiple, essentially co-located, antennas.

The central paradigm behind BLAST is the exploitation, rather than the mitigation, of multipath effects in order to achieve very high spectral efficiencies (bits/sec/Hz), significantly higher than are possible when multipath is viewed as an adversary rather than an ally.

Using our laboratory testbed, the BLAST team recently demonstrated what we believe to be **unprecedented wireless spectral efficiencies, ranging from 20 - 40 bps/Hz**. By comparison, the efficiencies achieved using traditional wireless modulation techniques range from around 1 - 5 bps/Hz (mobile cellular) to around 10 - 12 bps/Hz (point-to-point fixed microwave systems). In the 30 kHz bandwidth utilized by our research testbed, the raw spectral efficiencies realized thus far in the lab correspond to payload data rates ranging from roughly 0.5 Mb/s to 1 Mb/s. By contrast, the data rate achievable in this bandwidth using typical traditional methods is only about 50 kbps.

This [high-level overview](#) discusses BLAST in more detail.

[Blast Measurements](#) have been done and reported.

Blast in the Press

For additional information, contact rav@bell-labs.com.

BLAST-related open literature

- D. Chizhik, G. Foschini, M. Gans, and R. Valenzuela, *Keyholes, Correlations, and Capacities of Multielement Transmit and Receive Antennas*, IEEE Transaction on Wireless Communications. Vol. 1, No. 2, April 2002, pp. 361-368.
- G. J. Foschini, M. J. Gans, *Capacity when Using Multiple Antennas at Transmit and Receive Sites and Rayleigh Faded Matrix Channel is Unknown to the Transmitter*, Advances in Wireless Communications, Ed. J. M Holtzman and M. Zorzi, Kulwer Academic Publishers, 1998.
- G. D. Golden, G. J. Foschini, R. A. Valenzuela, P. W. Wolniansky, *Detection Algorithm and Initial Laboratory Results using the V-BLAST Space-Time Communication Architecture*, Electronics Letters, Vol. 35, No. 1, Jan. 7, 1999, pp. 14-15.
- G. J. Foschini, G.D. Golden, R.A. Valenzuela, P.W. Wolniansky, *Simplified Processing for Wireless Communication at High Spectral Efficiency*, IEEE Journal on Select Areas in Coummunications, Vol. 17, No.

11, 1999.

- D-S. Shiu, G.J. Foschini, M.J. Gans, J.M.Kahn, Fading Correlation, and its Effect on the Capacity of Multielement Antenna Systems, IEEE Transactions on Communications, Vol. 48, No. 3, 2000.
- P. W. Wolniansky, G. J. Foschini, G. D. Golden, R. A. Valenzuela, *V-BLAST: An Architecture for Realizing Very High Data Rates Over the Rich-Scattering Wireless Channel*, invited paper, Proc. ISSSE-98, Pisa, Italy, Sept. 29, 1998.
[[PostScript \(839 kb\)](#)] [[gzipped PostScript \(71 kb\)](#)] [[PDF \(46 kb\)](#)]
- G. D. Golden, G. J. Foschini, P. W. Wolniansky, R. A. Valenzuela, *V-BLAST: A High Capacity Space-Time Architecture for the Rich-Scattering Wireless Channel*, Proc. Int'l Symposium on Advanced Radio Technologies Boulder, CO, Sept. 10, 1998.
- G. D. Golden, G. J. Foschini, R. A. Valenzuela, P. W. Wolniansky, *V-BLAST: A High Capacity Space-Time Architecture for the Rich-Scattering Wireless Channel*, Fifth Workshop on Smart Antennas in Wireless Mobile Communications, Stanford Univ., July 23-24, 1998.
- G. J. Foschini and M. J. Gans, *On Limits of Wireless Communications in a Fading Environment When Using Multiple Antennas*, Wireless Personal Communications, Volume 6, No. 3, March 1998, p. 311.
- G. J. Foschini and R. A. Valenzuela, *Initial Estimation of Communications Efficiency of Indoor Wireless Channels*, Wireless Networks, 3 (1997) pp 141-154.
- G. J. Foschini, *Layered Space-Time Architecture for Wireless Communication in a Fading Environment When Using Multiple Antennas*, Bell Labs Technical Journal, Vol. 1, No. 2, Autumn 1996, pp 41-59.
- G. J. Foschini and M. J. Gans, *Capacity When Using Diversity at Transmit and Receive Sites and the Matrix Channel is Unknown at the Transmitter*, Proceedings of the 6-th WINLAB Workshop on 3rd Generation Wireless Information Networks, March 20-21, 1996, New Brunswick, New Jersey.

BLAST- Measurement Literature

- M. Gans et. al., *Multielement Antenna Systems Capacity Measurements at 2.44GHz in Suburban Outdoor Environment*, IEEE Vehicular Technology Conference, Spring 2001.
- J. Ling, et. al., *Multiple Transmit Multiple Receive (MTMR) Capacity Survey in Manhattan*, Electronic Letters, Vol. 37, No. 16, August 2001, pg. 1041.
- D. Chizhik, J. Ling, P. Wolniansky, R. Valenzuela, N. Costa, and K. Huber, *Multiple Input Multiple Output Measurements and Modeling in Manhattan*, Submitted to JSAC Special Issue on MIMO.

haleem@bell-labs.com

Last updated 6/5/00


Copyright ©Lucent Technologies 1998, 1999, 2000. All rights reserved.

SD060

Liquid Cooled Diesel Engine Generator Sets

Continuous Standby Power Rating
60KW 60 Hz / 60KVA 50 Hz

Prime Power Rating
48KW 60 Hz / 48KVA 50 Hz

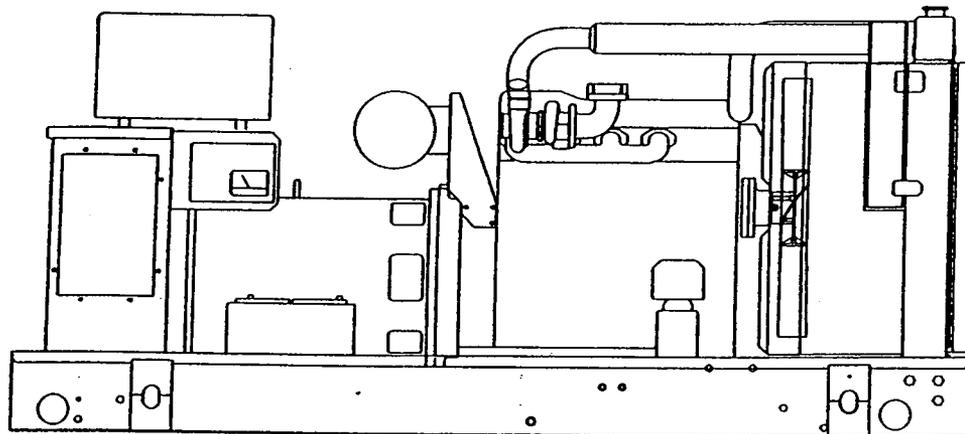

Power Matched
GENERAC 3.9DTA ENGINE
Turbocharged

FEATURES

- **INNOVATIVE DESIGN & PROTOTYPE TESTING** are key components of GENERAC'S success in "IMPROVING POWER BY DESIGN." But it doesn't stop there. Total commitment to component testing, reliability testing, environmental testing, destruction and life testing, plus testing to applicable CSA, NEMA, EGSA, and other standards, allows you to choose GENERAC POWER SYSTEMS with the confidence that these systems will provide superior performance.
- **TEST CRITERIA:**
 - ✓ PROTOTYPE TESTED
 - ✓ SYSTEM TORSIONAL TESTED
 - ✓ ELECTRO-MAGNETIC INTERFERENCE
 - ✓ NEMA MG1-22 EVALUATION
 - ✓ MOTOR STARTING ABILITY
 - ✓ SHORT CIRCUIT TESTING
 - ✓ UL 2200 COMPLIANCE AVAILABLE
- **SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION.** This state-of-the-art power maximizing regulation system is standard on all Generac models. It provides optimized
- **FAST RESPONSE** to changing load conditions and **MAXIMUM MOTOR STARTING CAPABILITY** by electronically torque-matching the surge loads to the engine.
- **SINGLE SOURCE SERVICE RESPONSE** from Generac's dealer network provides parts and service know-how for the entire unit, from the engine to the smallest electronic component. You are never on your own when you own an GENERAC POWER SYSTEM.
- **ECONOMICAL DIESEL POWER.** Low cost operation due to modern diesel engine technology. Better fuel utilization plus lower cost per gallon provide real savings.
- **LONGER ENGINE LIFE.** Generac heavy-duty diesels provide long and reliable operating life.
- **GENERAC TRANSFER SWITCHES, SWITCHGEAR AND ACCESSORIES.** Long life and reliability is synonymous with GENERAC POWER SYSTEMS. One reason for this confidence is that the GENERAC product line includes its own transfer systems, accessories, switchgear and controls for total system compatibility.

GENERAC®

POWER SYSTEMS, INC.

SD060

OPERATING DATA

	STANDBY		PRIME	
	SD060		SD060	
GENERATOR OUTPUT VOLTAGE/KW-60Hz		Rated AMP		Rated AMP
120/240V, 1-phase, 1.0 pf	60	250	48	200
120/208V, 3-phase, 0.8 pf	60	208	48	166
120/240V, 3-phase, 0.8 pf	60	180	48	144
277/480V, 3-phase, 0.8 pf	60	90	48	72
600V, 3-phase, 0.8 pf	60	72	48	58
GENERATOR OUTPUT VOLTAGE/KVA-50Hz		Rated AMP		Rated AMP
110/220V, 1-phase, 1.0 pf	48	218	38	172
115/200V, 3-phase, 0.8 pf	60	173	48	138
100/200V, 3-phase, 0.8 pf	60	173	48	138
231/400V, 3-phase, 0.8 pf	60	87	48	69
480V, 3-phase, 0.8 pf	60	72	48	58
MOTOR STARTING KVA				
Maximum at 35% instantaneous voltage dip with standard alternator, 50/60 Hz	<u>120/208/240V</u>	<u>277/480V</u>	<u>120/208/240V</u>	<u>277/480V</u>
with optional alternator, 50/60 Hz	100/120 234/281	117/141 276/331	100/120 234/281	117/141 276/331
FUEL				
Fuel consumption—60 Hz				
Load	<u>100%</u>	<u>80%</u>	<u>100%</u>	<u>80%</u>
gal./hr.	4.3	3.6	3.6	3.0
liters/hr.	16.3	13.5	13.6	11.3
Fuel consumption—50 Hz				
gal./hr.	3.6	3.0	3.0	2.5
liters/hr.	13.5	11.2	11.3	9.3
Fuel pump lift				
COOLING				
Coolant capacity				
System - lit. (US gal.)	15.9 (4.2)		15.9 (4.2)	
Engine - lit. (US gal.)	6.4 (1.7)		6.4 (1.7)	
Radiator - lit. (US gal.)	9.5 (2.5)		9.5 (2.5)	
Coolant flow/min.				
60 Hz - lit. (US gal.)	128 (34)		128 (34)	
50 Hz - lit. (US gal.)	107 (28)		107 (28)	
Heat rejection to coolant 60 Hz full load BTU/hr.	170,900		136,700	
Heat rejection to coolant 50 Hz full load BTU/hr.	142,400		113,900	
Inlet air to radiator				
60 Hz - m ³ /min. (cfm)	204 (7,200)		204 (7,200)	
50 Hz - m ³ /min. (cfm)	170 (6004)		170 (6004)	
Max. air temperature to radiator °C (°F)	54.4 (130)		54.4 (130)	
Max. ambient temperature °C (°F)	48.9 (120)		48.9 (120)	
COMBUSTION AIR REQUIREMENTS				
Flow at rated power				
60 Hz - cfm	209		168	
50 Hz - m ³ /min.	4.7		3.8	
EXHAUST				
Exhaust flow at rated output				
60 Hz - m ³ /min. (cfm)	15.5 (549)		12.4 (439)	
50 Hz - m ³ /min. (cfm)	12.3 (434)		10 (353)	
Max recommended back pressure "Hg	1.5		1.5	
Exhaust temperature 60 Hz (full load) °C (°F)	524 (975)		459 (858)	
Exhaust outlet size	3"		3"	
ENGINE				
Rated RPM				
60 Hz	1800		1800	
50 Hz	1500		1500	
HP at rated KW				
60 Hz	92		74	
50 Hz	73		59	
Piston speed				
60 Hz - m/min. (ft./min.)	414 (1358)		414 (1358)	
50 Hz - m/min. (ft./min.)	345 (1132)		345 (1132)	
BMEP				
60 Hz - psi	170		138	
50 Hz - psi	161		130	
DERATION FACTORS				
Temperature				
5% for every 10°C above - °C	25		25	
2.77% for every 10°F above - °F	77		77	
Altitude				
1.1% for every 100 m above - m	1829		1829	
3.5% for every 1000 ft. above - ft.	6000		6000	

STANDARD ENGINE & SAFETY FEATURES

SD060

- High Coolant Temperature Automatic Shutdown
- Low Coolant Level Automatic Shutdown
- Low Oil Pressure Automatic Shutdown
- Overspeed Automatic Shutdown (Solid-state)
- Crank Limiter (Solid-state)
- Oil Drain Extension
- Radiator Drain Extension
- Factory-Installed Cool Flow Radiator
- Closed Coolant Recovery System
- UV/Ozone Resistant Hoses
- Rubber-Booted Engine Electrical Connections
- Secondary Fuel Filter

- Fuel Lockoff Solenoid
- Stainless Steel Flexible Exhaust Connection
- Battery Charge Alternator
- Battery Cables
- Battery Tray
- Vibration Isolation of Unit to Mounting Base
- 12 Volt, Solenoid-activated Starter Motor
- Air Cleaner
- Fan Guard
- Control Console
- Radiator Duct Adapter

OPTIONS

■ OPTIONAL COOLING SYSTEM ACCESSORIES

- Coolant Heater 120V

■ OPTIONAL FUEL ACCESSORIES

- Flexible Fuel Lines
- UL Listed Fuel Tanks
- Base Tank Low Fuel Alarm
- Primary Fuel Filter
- Primary Fuel Filter with Heater

■ OPTIONAL EXHAUST ACCESSORIES

- Critical Exhaust Silencer

■ OPTIONAL ELECTRICAL ACCESSORIES

- Battery, 12 Volt, 135 A.H., 4DLT
- 2A Battery Charger
- 10A Dual Rate Battery Charger
- Battery Heater

■ OPTIONAL ALTERNATOR ACCESSORIES

- Alternator Upsizing
- Alternator Strip Heater
- Alternator Tropicalization
- Voltage Changeover Switch
- Main Line Circuit Breaker

■ CONTROL CONSOLE OPTIONS

- Analog Control "C" Panel (Bulletin 0151160SBY)
- Analog/Digital Control "E" Panel (Bulletin 0161310SBY)

■ ADDITIONAL OPTIONAL EQUIPMENT



- Automatic Transfer Switch
- Isochronous Governor
- 3 Light Remote Annunciator
- 5 Light Remote Annunciator
- 20 Light Remote Annunciator
- Remote Relay Panels
- Unit Vibration Isolators (Pad/Spring)
- Oil Make-Up System
- Oil Heater
- 5 Year Warranties
- Export Boxing
- GenLink® Communications Software

■ OPTIONAL ENCLOSURE

- Weather Protective
- Sound Attenuated
- Aluminum and Stainless Steel
- Enclosed Muffler

Distributed by:

Design and specifications subject to change without notice. Dimensions shown are approximate. Contact your Generac dealer for certified drawings. DO NOT USE THESE DIMENSIONS FOR INSTALLATION PURPOSES.

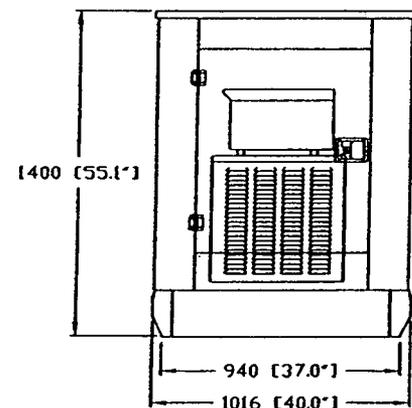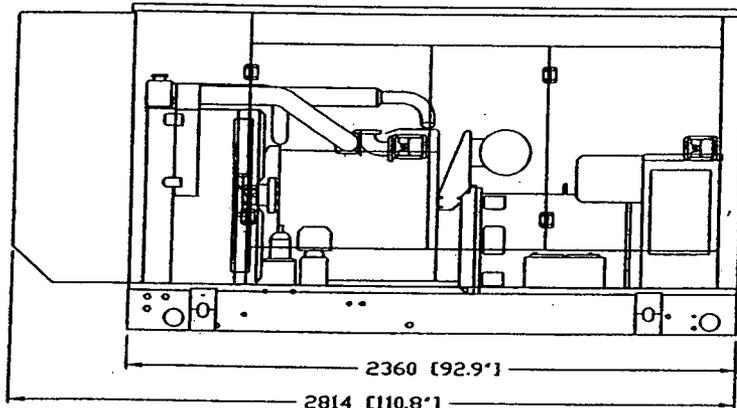

mm [in]

GENERAC POWER SYSTEMS, INC. • P.O. BOX 8 • WAUKESHA, WI 53187

262/544-4811 • FAX 262/544-4851