
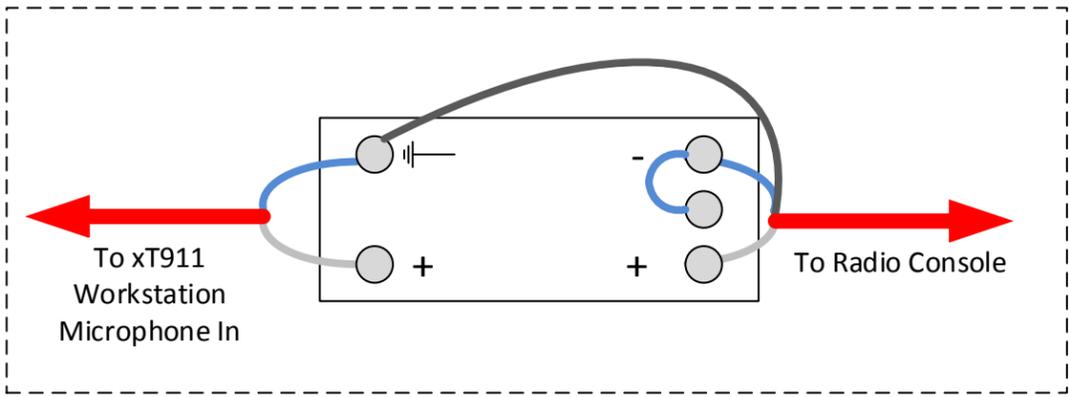


Balanced / Unbalanced Radio Interface Cable MD6098

NOTE:
 All cable is to be 2-conductor + ground shielded audio-grade cable. Canare L2T2S or equivalent.

Plug Pin Out (Both Cables)
 Tip: Conductor 1
 Ring: Conductor 1
 Sleeve: Conductor 2 & Ground/Shield

Radio Connections
 Conductor 1: Phone Receive +
 Conductor 2: Phone Receive GND
 Shield/Ground: No Connection

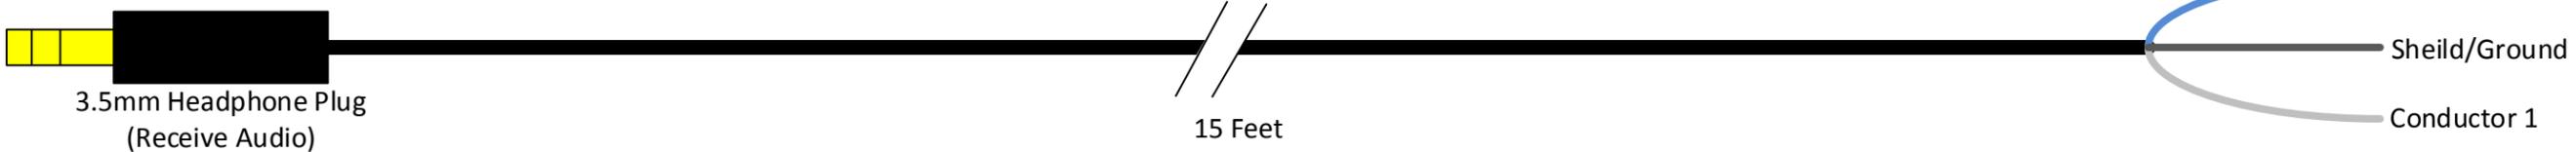

Adjustable Line Transformer Connections

Radio Connections (Balanced)
 Conductor 1: Phone Transmit +
 Conductor 2: Phone Transmit -
 Shield/Ground: Phone Transmit GND

Radio Connections (Unbalanced)
 Conductor 1: Phone Transmit +
 Conductor 2: Phone Transmit GND
 Shield/Ground: No Connection