







ONE WAY TRAFFIC SIGNAL PEDESTAL MOUNTED

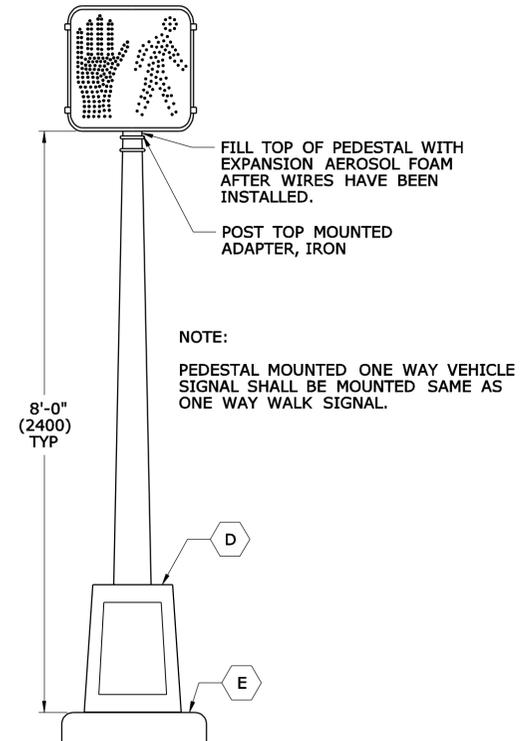


ONE WAY WALK SIGNAL PEDESTAL MOUNTED

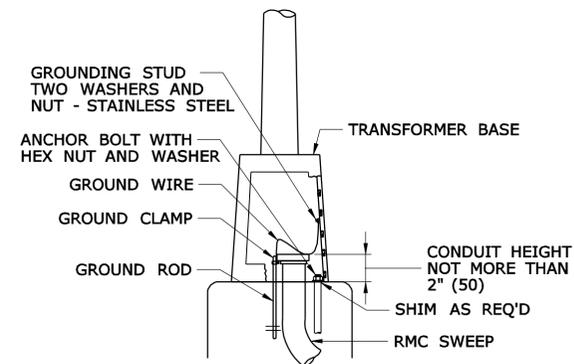


ALUMINUM PEDESTAL INSTALLATION DETAIL

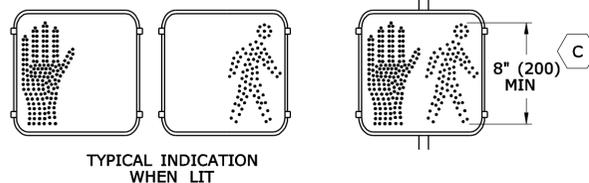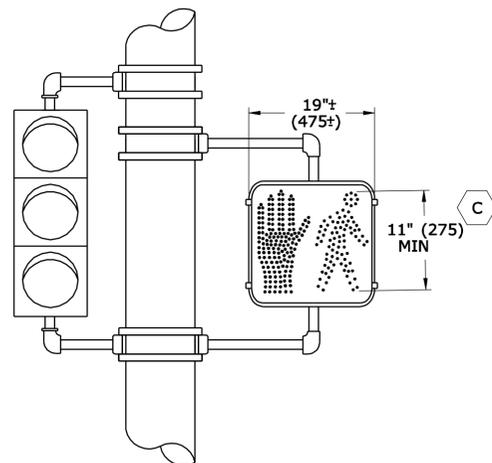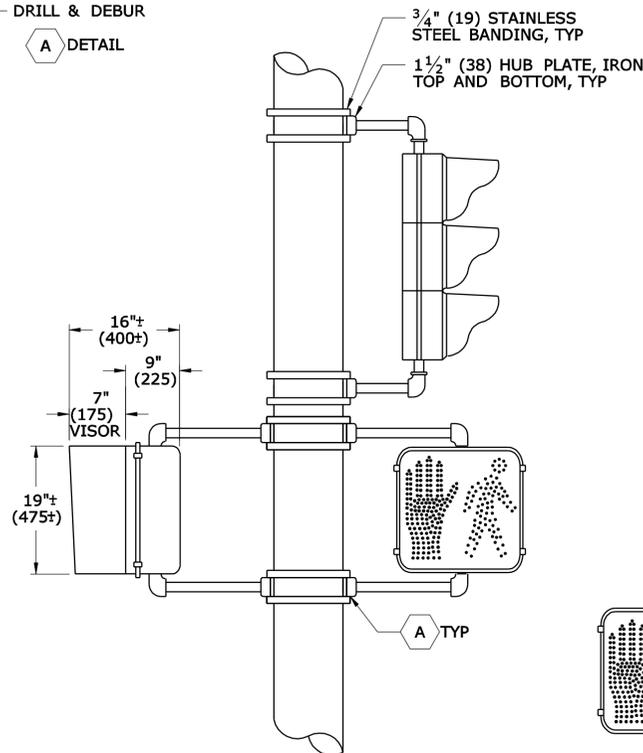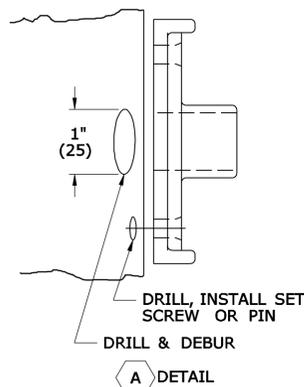


TYPICAL INDICATION WHEN LIT

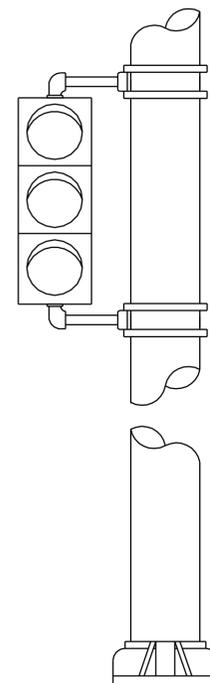


ONE WAY TRAFFIC SIGNAL POLE MOUNTED

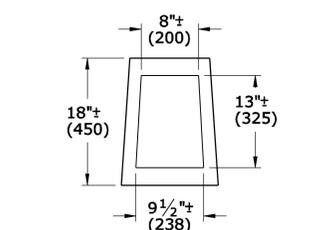

ALUMINUM PEDESTAL DOOR OPENING DETAIL

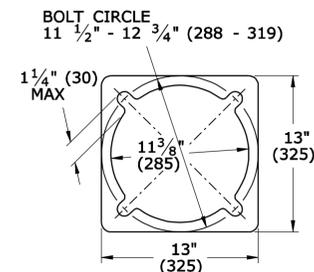

PEDESTAL BASE PLAN

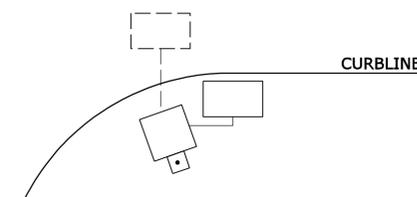

WHEN PEDESTALS OR SPAN POLES ARE INSTALLED CLOSE TO THE CURB, SIDE MOUNT PEDESTAL OR TRAFFIC SIGNALS TO AVOID VISOR DAMAGE FROM TURNING VEHICLES.

NOTES:

- A SECURE LOWER HUB PLATE WITH STAINLESS STEEL SET SCREW OR PIN PRIOR TO BANDING TO PREVENT MOVEMENT. INSTALL CABLE THROUGH BOTTOM OF HUB PLATE.
- B REFER TO TRAFFIC SIGNAL INSTALLATION TYPICAL DETAIL FOR ASSEMBLY HARDWARE.
- C REFER TO TRAFFIC CONTROL SIGNAL PLAN FOR SIZE OF PEDESTRIAN SYMBOL.
- D IF THREADED, MIN 1" (25) THREADED INTO BASE, SECURED WITH STAINLESS STEEL SET SCREWS.
- E BASE DESIGNED AS BREAK-AWAY.

INCANDESCENT WALK SIGNAL LAMPS ARE 67 WATTS, RATED AT 8000 HOURS LAMP LIFE. LED WALK SIGNAL LAMPS ARE MAXIMUM 15 WATTS, WARRANTED AT 5 YEAR LIFE.

REV.	DATE	REVISION DESCRIPTION	SHEET NO.
9	1-08	REVISED FOR 2007 DIG DGN ENVIRON STDS	
8	2/07	REVISED HARDWARE. ADDED HUB LATE DETAIL.	
7	1/07	ELIMINATED CABLE GUIDE HUB PLATE. REVISED PLAN TO INCLUDE MICROSTATION V8 FORMAT AND OTHER UPDATES.	

DIMENSIONS ARE IN ENGLISH ("AND ") AND METRIC UNITS (mm). METRIC CONVERSIONS OVER 1" ROUNDED TO NEAREST 5 mm - UNDER 1" TO NEAREST 1 mm.

DESIGNER/DRAFTER:
D. K. SWINBURNE
CHECKED BY:
R.M. WATERMAN

SCALE - NONE



SIGNATURE/
BLOCK:
OFFICE OF ENGINEERING
SUBMITTED BY:
MICHAEL J. GARVIE
APPROVED BY: DATE:
ROBERT S. TWOROWSKI 1-31-07

PROJECT TITLE:

TOWN:

PROJECT NO.

DRAWING NO.

DRAWING TITLE:
TYPICAL INSTALLATION DETAILS
PEDESTAL & POLE MOUNTED TRAFFIC
SIGNALS & PEDESTRIAN SIGNALS

9 SHEET NO.

Filename: \$FILE\$\$